

MacroBin® 26 Series

MACROBIN FAMILY

The MacroBin 26 Series, Macro's most popular line of bulk harvest and storage bins, is designed with a square footprint to hold up to 1,300 pounds. With double-wall corner and center posts, and two full-length feet with a positive interlocking feature, these bins are durable, yet still lightweight and easy to handle.



Features

Impact-grade plastic lasts longer, standing up to heavy day-to-day use, season after season. The molded plastic resists splintering, reducing damage to product and maintenance costs. Bin repair is inexpensive with hot air welding.

Lightweight construction reduces shipping costs and makes MacroBins easier to move; the direct load corner posts and interlocking foot design make them safer to stack.

FDA-approved materials are certified safe for use with food products, eliminating many HACCP problems associated with wood bins.

Ventilation slots facilitate the use of thermofogging, reduce heat absorption and cooling costs, and provide for quicker drying and degreening. Narrow vents are also available.

Nonporous surfaces won't absorb water or dehydrate your product like wood bins, and they provide a constant tare weight throughout their use.

Rounded corners and smooth surfaces means fewer scuffs, abrasions, and cuts on your tender fruits. Risk of contamination is reduced because there are fewer places for unwanted particles to hide.

Easy-to-sanitize MacroBins keep cleaning costs to a minimum. A high-pressure wash removes most debris; a nonabrasive brush can dislodge any remaining items.

MacroBin® 26 Series

800-845-6555
www.iplglobal.com

Benefits of Using MacroBins




Increased productivity
Lightweight MacroBins are easy to handle, move, and transport. The unique interlocking foot design makes them easy to align and stack.



Reduced cooling costs
Hundreds of vents in the sides and base promote air flow, make the environment less conducive to pathogen growth, and help your products stay



Reduced bin repair costs
MacroBins are virtually maintenance free; repairs are easy with hot air welding.

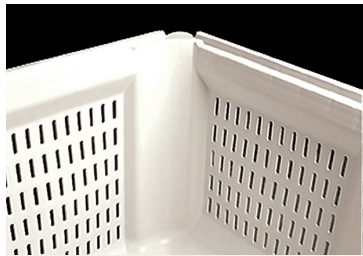

Better sanitation and reduced contamination
Smooth, nonporous surfaces are easy to sanitize and won't trap debris, breed bacteria, or absorb chemicals like wood bins.



Improved pack out
Rounded corners and smooth surfaces mean fewer scuffs, abrasions, and cuts on your product.



Improved traceability and bin security
Several identification methods including RFID tags and attractive foil embossing are available.

MacroBin 26-FV Specifications

Load Capacity	1,300 lbs
Volume Capacity	49,603 cubic inches (+/- 4%)
Tare Weight	87.5 lbs
Maximum Stack Weight ¹	12,000 lbs (long term, ambient temperature) 13,000 lbs [short term (<1 month), ambient temp.] 15,000 lbs [long term, cold storage (0 °F to 35 ° F) ²]
Molding Process	High-pressure injection molding
Material	Polypropylene, U.V. stabilized
Approval	FDA-regulated material
Foot Design	Two full-length feet with positive interlocking feature
Ventilation Slots	1 3/4" (L) x 5/16" (W) in sides 1 1/4" (L) x 5/16" (W) in base Over 600 air vents in sides and base for uniform air flow; rounded surfaces on interior edges of slots
Fork Lift Entry	Two-way: 3" opening with patented integral slide-entry
External Dimensions	47 3/4" (L) x 47 3/4" (W) x 28 1/2" (H)
Internal Dimensions	44 1/2" (L) x 44 3/8" (W) x 24" (H)
Options	MacoLid, Narrow Vents (3/16" wide)

Notes

Dimensions assume tolerance of 1/4". Volume capacities assume tolerance of 5% and tare weights assume a tolerance of 4% unless noted otherwise. Ambient temperature approximately equal to 75° F. Data is subject to change.

¹ Stack Weight = (weight of bin contents + tare weight of bin) X number of bins in stack

² Please contact Macro if storage temperature is below 0° F.

Please refer to the appropriate User Guide for information on the safe transportation, stacking and handling of Macro products. The User Guides in